

BICOTEX

Description:

Felts made of cotton fibre and PES RESIN and PES bico fiber. Optionally, can be provided with one non-woven (of 50 or 100g/m²) side or acrílic/hotmelt adhesive.

Application:


Acoustic and thermal insulators for building and car industries

Packaging:


FORMAT	LENGTH	WIDTH	PACKAGING
rolls	max. 60 m	max. 2,40 m	LDPE plastic
plates	max. 2,0 m		carton boxes or HDPE plastic

Acoustical properties:

COEFICIENTE DE ABSORCIÓN ACÚSTICA EN CÁMARA REVERBERANTE (V=6.5m³)

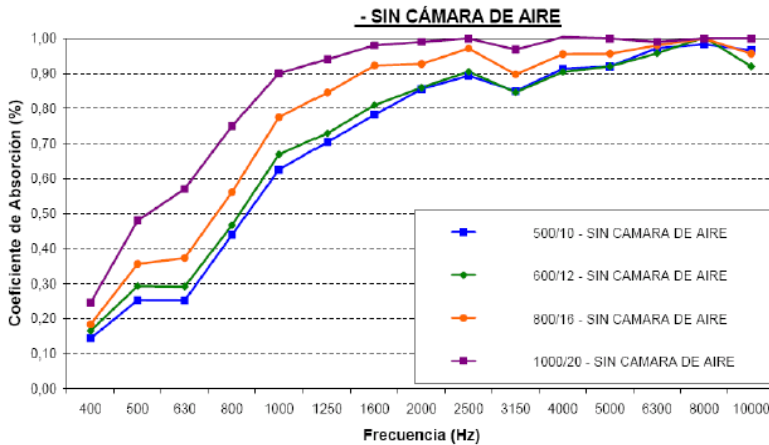

COEFICIENTE DE ABSORCIÓN ACÚSTICA EN CÁMARA REVERBERANTE (V=6.5m³)

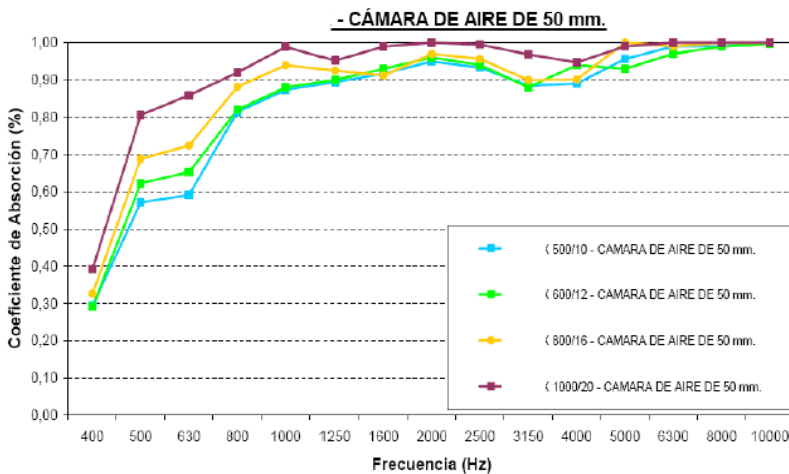

TECHNICAL DATA:

Weight: 600-1000 g/m² ± 100
 >1000-2000 g/m² ± 200
 >2000 g/m² ± 300

Combustibility: < 100 mm/min acc. to FMVSS302
 Fogging: ≥90% acc VDA 375
 Smell: ≤3; 24h a r.t.
 ≤3; 24h a 40°C
 ≤3; 2h a 80°C
 Scrim peeling: ≥ 1 N / 10 mm D51 1485
 Mould resistance: no mould through
 100h at 38°, 95%HR

